



MEDIUM ROMAN POOL SURROUND C470M

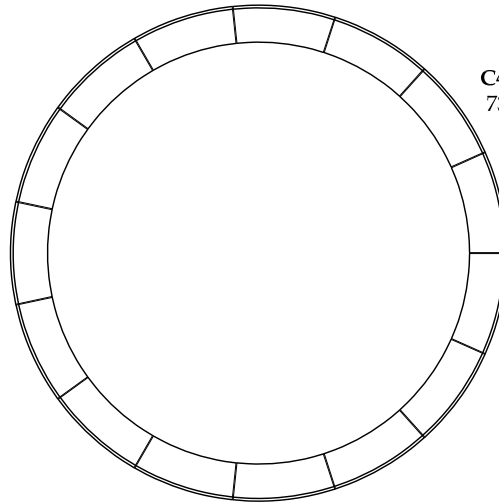

C4702 KERB
73 kg (161 lbs)

Ø 10mm ($\frac{3}{8}$ ") stainless steel dowels (not supplied) 50mm (2") projection into stone. Holes to be drilled on site to suit by others. Minimum of 2 No dowels per stone secured using a flexible building adhesive such as Evode Serious Stuff, Loctite Fast Grab, or similar

To guard against frost damage, drain off water before winter and do not replace it until the hard frosts are past in the following spring

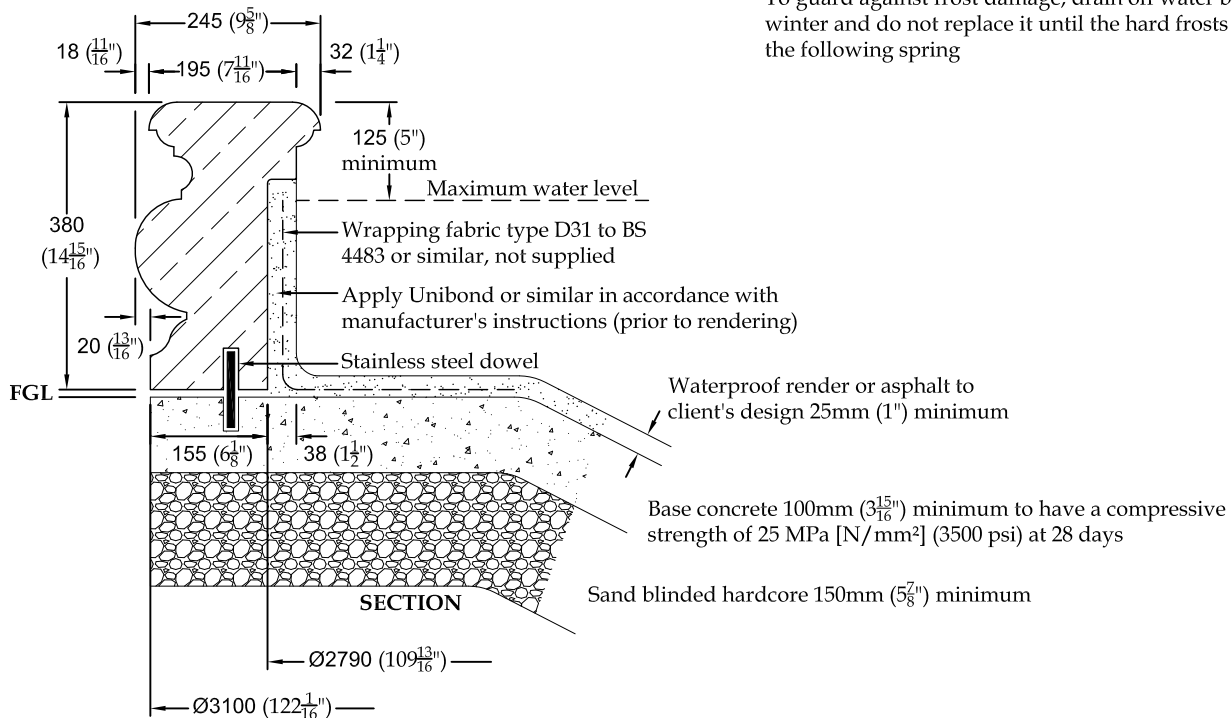

Allow 6mm ($\frac{1}{4}$ ") for vertical and bedding joints
Unless otherwise stated, all materials other than stonework to be supplied by others