



PLUMBING MEDIUM, LARGE, EXTRA LARGE & EXTRA EXTRA LARGE POOLS

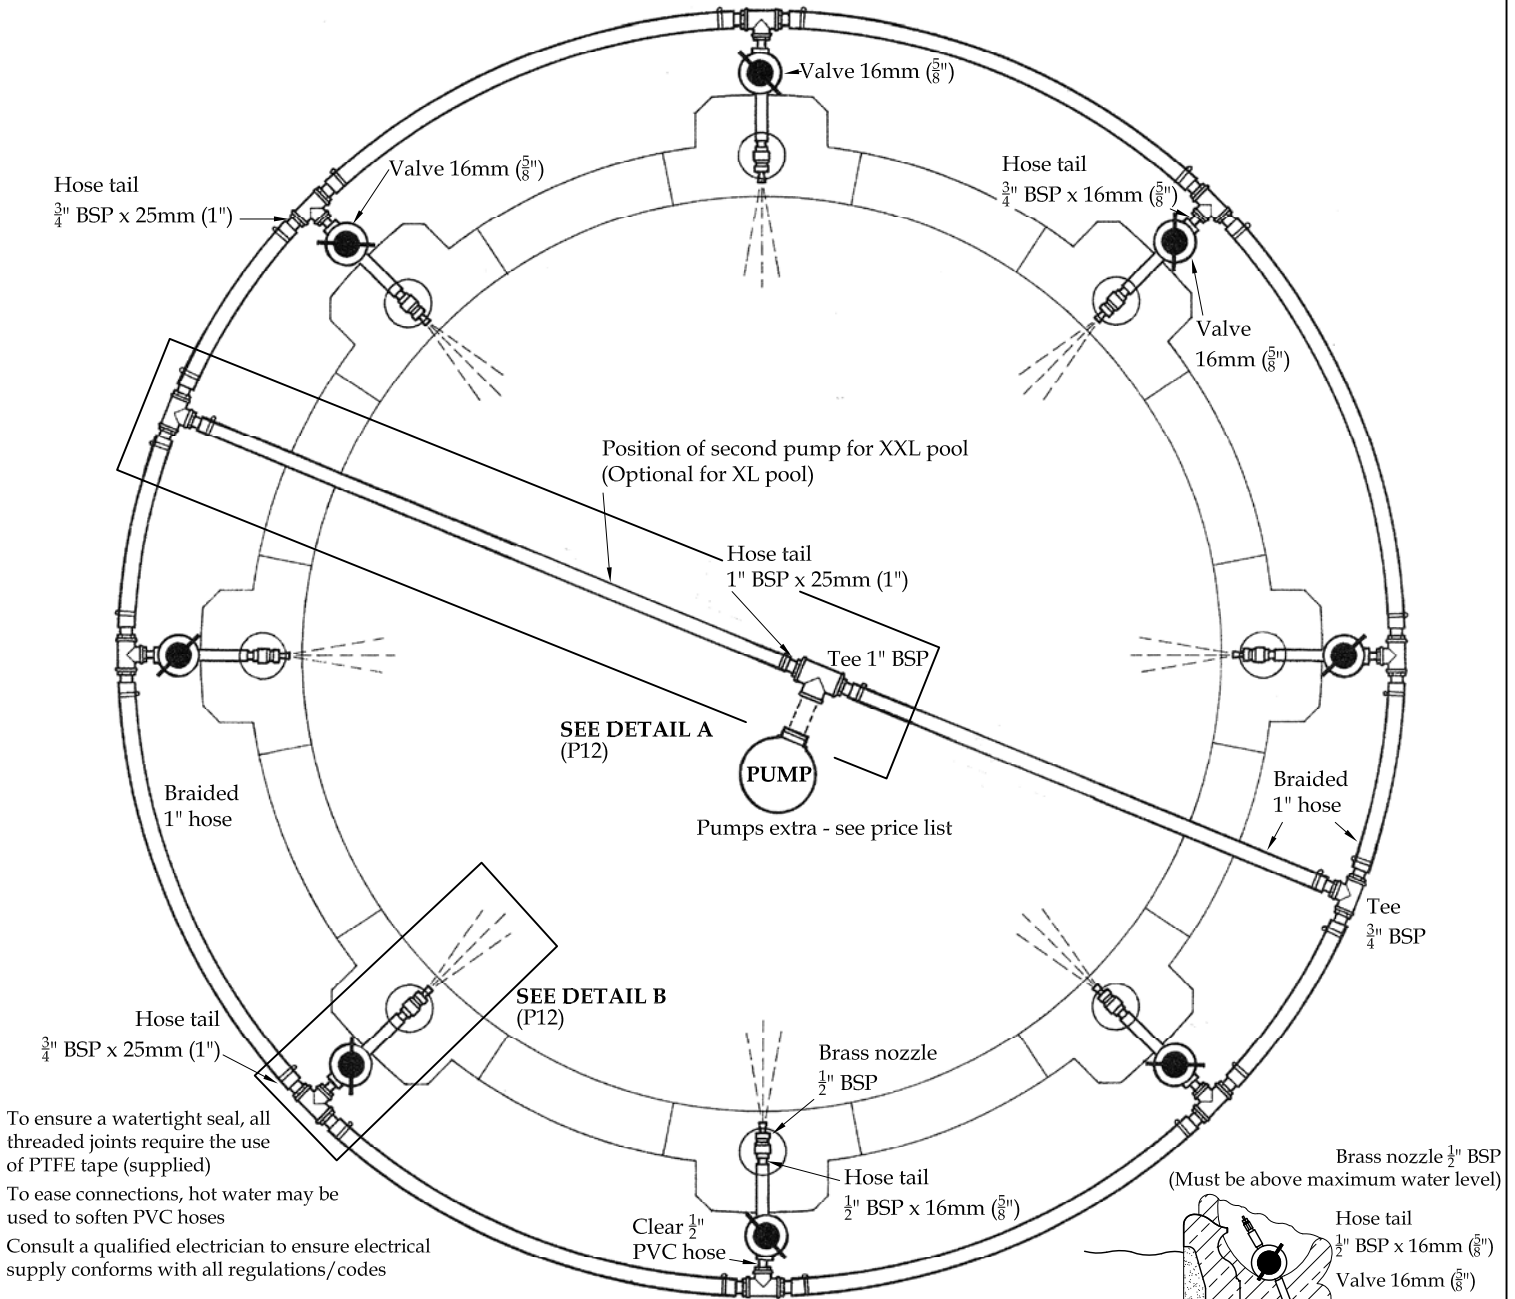

To ensure a watertight seal, all threaded joints require the use of PTFE tape (supplied)
 To ease connections, hot water may be used to soften PVC hoses
 Consult a qualified electrician to ensure electrical supply conforms with all regulations/codes

Brass nozzle 1/2" BSP
 (Must be above maximum water level)

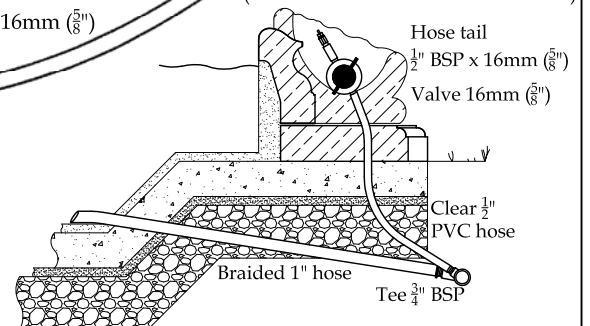

COMPONENT LISTING:	X365 Medium pool 6 vases	X370 Large pool 8 vases	X375 Extra large pool 12 vases	X380 Extra extra large pool 14 vases
Tee 1" BSP	x1	x1	x1	x1
Tee 3/4" BSP	x8	x10	x14	x16
16mm (5/8") valve	x6	x8	x12	x14
Hose tail 1" BSP x 25mm (1")	x3	x3	x3	x3
Hose tail 3/4" BSP x 25mm (1")	x18	x22	x30	x34
Hose tail 3/4" BSP x 16mm (5/8")	x6	x8	x12	x14
Hose tail 1/2" BSP x 16mm (5/8")	x6	x8	x12	x14
Brass nozzle 1/2" BSP	x6	x8	x12	x14
Jubilee clip 1"	x26	x30	x38	x42
Braided 1" hose	18m (59 ft)	23m (75 ft)	30m (98 ft)	35m (115 ft)
Clear 1/2" PVC hose	15m (49 ft)	20m (66 ft)	24m (79 ft)	30m (98 ft)

Medium pool: Read in conjunction with P12, P30 & P50
 Large pool: Read in conjunction with P12, P20 & P50
 Extra large pool: Read in conjunction with P12, P10 & P50
 Extra extra large pool: Read in conjunction with P12, P80 & P50
 Unless otherwise stated, all materials other than stonework to be supplied by others - all hosing to be cut on site